

EXHIBIT 2

RAMAN ANALYSIS SYSTEM FOR
OLEFIN POLYMERIZATION CONTROL

INVENTORS: ROBERT L. LONG, ROBERT E. YOUNG, AND PAUL A.
BARTEL

THIS APPLICATION CLAIMS PRIORITY TO AND FULLY
INCORPORATES BY REFERENCE PROVISIONAL APPLICATION USSN
60/146,632, FILED JULY 30, 1999

FIELD OF INVENTION

This invention relates to spectroscopic in-situ analysis of constituents in a chemical reaction. More particularly, this invention relates to spectroscopic in-situ analysis of constituents in a slurry loop polymerization reactor.

BACKGROUND OF THE INVENTION

Spectroscopic analysis is a branch of analytical chemistry devoted to identification of elements and elucidation of atomic and molecular structure. Generally, the identification of elements and elucidation of atomic and molecular structure is accomplished by illuminating or irradiating the substance under examination and then measuring the radiant energy absorbed or emitted by the substance. The energy absorbed or emitted may be in any of the wavelengths of the electromagnetic spectrum. By comparing and/or correlating the measured wavelengths absorbed or emitted by the sample with wavelengths emitted or absorbed from known elements or molecules, information about a sample may be determined.

More particularly, spectroscopic analysis generally requires isolating a portion of the substance under investigation. The isolated portion is then prepared for illuminating or irradiating by an energy source. After irradiation, the energy

absorbed or emitted by the isolated portion is measured and correlated to values derived from known materials measured under similar conditions.

Spectroscopic analysis is a common tool used in laboratories and industrial processes. Its use includes determining the molecular identity and properties of a chemical composition as well as monitoring the progress of a reaction. Whether conducting a laboratory exercise or industrial process, this type of information is desirable. This is so because, for example, data derived from spectroscopic analysis may be used to identify the final product of these reactions and determine the consumption and/or identity of intermediates produced at selected stages in a multi stage process.

For industrial processes and particularly industrial chemical reactions, in-situ identification and monitoring of the (i) reaction constituents, (ii) the reaction intermediates, (iii) the consumption rate of the starting materials, and (iv) the final product are desirable. In-situ analysis is desirable generally because the analysis environment is the reaction environment within the reaction vessel. In this way, the isolation and preparation of a portion of the substance under investigation prior to irradiation is avoided. And still more desirable is the acquisition and assimilation of analysis information after the passage of relatively a short period of time from the moment the analysis process is initiated (otherwise referred to as "real time analysis").

However, there remains many industrial process, and particularly industrial chemical reaction environments, for which spectroscopic analysis techniques do not offer an investigator the option of conducting reliable, in-situ, real time analysis. As such, there exists a need for further development in the field of in-situ, real time spectroscopic analysis and the application thereof in industrial processes.

SUMMARY OF THE INVENTION

The present invention provides both apparatus and methods for conducting in-situ, real time spectroscopic analysis of one or more reaction constituents



present in a reactor, particularly a slurry olefin polymerization reactor and more particularly, a slurry loop olefin polymerization reactor. Examples of reaction constituents include polymerized and polymerizable olefins. Examples of polymerized olefins include but are not limited to polypropylene, polyethylene, polyisobutylene, and homopolymers and copolymers thereof. Other examples of reactor constituents include, but are not limited to, hydrogen, propane, ethane, butane monomers, and comonomers. Examples of monomers and comonomers include, but are not limited to, ethylene, propylene, butene, hexene, octene, isobutylene, styrene, norbornene and the like.

Without limiting the present invention to any particular spectroscopic analysis technique, the inventors have observed in a slurry reaction environment a correlation between in-situ collected Raman spectra (a product of Raman spectroscopy) from the liquid phase of the reaction environment and the concentration of at least one reactor constituent. Furthermore, the inventors have discovered that this correlation, in combination with in-situ, real time analysis of at least one reactor constituent in such a reactor will allow for improved control of the final product properties, such as melt flow rate. Improved control of the final product properties is achieved by metering the flow of at least one reactor constituent into the slurry reactor in response to the in-situ measured concentration of at least one reactor constituent.

In one embodiment, a method of olefin polymerization in a reactor having reactor constituents in a liquid phase is provided. The method steps include measuring in-situ a first reactor constituent and metering the flow of a second reactor constituent into the reactor in response to the measuring step. The first and second reactor constituents may be the same constituent or they may be different constituents.

In another embodiment, another method of olefin polymerization in a multi-phase reactor containing reactor constituents is provided. The method steps include irradiating in-situ the reactor constituents, measuring scattered or reflected energy from the irradiated reactor constituents, determining from the measured


4

scattered or reflected energy a concentration of at least one reactor constituent, and metering the flow of at least one reactor constituent into the reactor in response to the determining step.

5 In another embodiment, a method of olefin polymerization in a reactor containing reactor constituents in a liquid phase is provided. These method steps include irradiating in-situ the liquid phase, measuring the frequencies scattered or reflected by the irradiated liquid phase, correlating at least one measured frequency with the concentration of a first reactor constituent, and metering, in response to the correlating step, a flow of the first reactor constituent into the reactor.

10 In another embodiment, another method of polymerizing a polyolefin in a reactor containing reactor constituents in a liquid phase is provided. These method steps include irradiating in-situ the liquid phase, measuring the frequencies scattered by the irradiated liquid phase, determining from the measured frequencies a concentration of one or more reactor constituents, comparing the concentration of one or more reactor constituents with one or more values that correlate to one or more selected physical properties of the polyolefin, and metering, in response to the correlating step, the flow of one or more reactor constituents into the reactor. One of the selected physical properties of the polyolefin may be melt flow rate. Additionally, the metered flow of one or more reactor constituents into the reactor may be controlled such that the polyolefin produced may be defined, in part, by a melt flow rate value within a selected melt flow rate range.

15 20 25 30 In another embodiment, a method of olefin polymerization in a slurry reactor containing reactor constituents, including hydrogen, in a liquid phase is provided. These method steps include, irradiating in-situ the liquid phase, measuring the frequency scattered or reflected by the hydrogen in the liquid phase, determining the concentration of hydrogen in the liquid phase from the measured frequency, and metering, in response to the concentration of hydrogen measured, the flow of the hydrogen into the reactor.



BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram of a slurry loop reactor plant schematically illustrating an in-situ Raman spectroscopic system and data feed from the same into the slurry loop reactor plant control system.

Figure 2 is a schematic view of the fiber optic probe assembly.

Figure 3 is an enlarged, fragmented, cross sectional view of a fiber optic probe tip.

Figure 4 is a schematic illustration of a laboratory slurry reactor.

Figure 5a is an illustration of Raman spectra of a pentane/propylene slurry.

Figure 5b is an expanded view of a portion of the spectra of Figure 5.

Figure 6 is a plot of hydrogen pressure vs. hydrogen prediction by Raman.

Figure 7 is an expanded Raman spectra of acetonitrile in pentane.

Figure 8 is an illustration of Raman spectrum of Polypropylene granules.

Figure 9 is a plot of predicted MFR from Raman analysis vs. known MFR.

Figure 10 is a plot of 1-hexene and ethylene Raman spectra.

Figure 11 is a plot of a relationship between the peak height of 1-hexene vs. 1-hexene concentration.

Figure 12 is a plot of a relationship between the peak height of the ethylene vs. ethylene concentration.

Figure 13 is a plot of an expanded Raman spectra for the slurry described in Example 5.

Figure 14 is a plot of a relationship between the ethylene peak ratio and the gas chromatograph ethylene concentration measurement.

Figure 15 is a plot of a correlation between the Raman polyethylene copolymer peak ratio and the slurry density/polyethylene copolymer concentration in the slurry loop reactor described in Example 5.

Figure 16 is a schematic illustration of an image probe assembly.

6

DETAILED DESCRIPTION OF THE INVENTION

Sub AI

5 The present invention provides both apparatus and methods for conducting in-situ, real time spectroscopic analysis of one or more reactor constituents present in a reactor, particularly a slurry olefin polymerization reactor and more particularly, a slurry loop olefin polymerization reactor. Examples of reaction constituents include, but are not limited to polymerized and polymerizable olefins. Generally, polymerizable olefins include, but are not limited to, C₂, C₃-C₂₀, alpha olefins, C₄-C₂₀ diolefins, C₅-C₂₀ cyclic olefins, C₇-C₂₀ vinyl aromatic monomers and C₄-C₂₀ geminally disubstituted olefins. More specific examples of

10 polymerizable olefins include but are not limited to propylene, ethylene, 1-butene, 1-hexene, 1-octene, polyisobutylene, 1,4-hexedine dicyclopentadiene, norbornene, ethylidene norbornene, vinyl norbornene and styrene, and products thereof, such as polyolefin copolymer elastomers and engineering olefin copolymers.

15 A slurry loop olefin polymerization reactor can generally be described as a loop-shaped continuous tube. In some instances, the reactor design may be generally "O" shaped. One or more fluid circulating devices, such as an axial pump, urge the reactor constituents within the tube in a desired direction so as to create a circulating current or flow of the reactor constituents within the tube. Desirably, the fluid circulating devices are designed to provide high velocity of

20 motion and a very intensive and well-defined mixing pattern of the reactor constituents. The reactor may be totally or partially jacketed with cooling water in order to remove heat generated by polymer polymerization.

25 In the slurry loop olefin polymerization reactor, the polymerization medium may include reactor constituents, such as, a liquid monomer, like propylene and/or a hydrocarbon solvent or diluent, advantageously aliphatic paraffin such as propane, isobutane, hexane, heptane, cyclohexane, etc. and/or an aromatic diluent such as toluene. The polymerization temperatures may be those considered low, e.g., less than 50° C, desirably 0° C - 30° C, or may be in a higher range, such as up to about 150° C, desirably from about 50° C up to about

30 80° C, or at any ranges between the end points indicated. Pressures can vary from

7

about 100 to about 700 psia (0.69-4.8 MPa). Additional description is given in U.S. Patents 5,274,056 and 4,182,810 and WO 94/21962 which are each fully incorporated by reference. As such, the reactor constituents generally are a combination of both solids, such as for example catalysts, catalyst supports, polymerized olefins, and the like as understood by those skilled in the art and liquids, such as those described above. The percentage of solids within the reactor constituents may be as high as 60 weight percent (wt%) of the reactor constituents. Desirably, the weight percent of solids is in the range of 45 wt% to 50 wt%.

The slurry loop olefin polymerization reactor may be operated in a single stage process or in multistage processes. In multistage processing, the polymerization of olefins is carried out in two or more reactors. These reactors may be configured in series or in parallel or a combination thereof. Examples of other olefin polymerization reactors suitable for multistage processing with slurry loop olefin polymerization reactors include slurry and slurry loop olefin polymerization reactors, gas phase olefin polymerization reactors, and other moving-bed, fixed-bed, or fluid-bed reactors.

Without limiting the present invention to any particular spectroscopic analysis technique, the present invention employs Raman spectroscopic techniques to determine the in-situ concentration of at least one reactor constituent, such as for example, hydrogen and desirably dissolved hydrogen present in the liquid phase. Examples of other measurable reactor constituents include but are not limited to diluents, monomers, comonomers, the identity of reaction intermediates, and final polymer properties, such as melt flow rate, comonomer content, crystallinity, melt index, viscosity index, polymer melt viscosity, density and percent unsaturation, and the like.

Raman spectroscopy analysis begins by irradiating a material under investigation with energy, such as electromagnetic energy for example in the visible or near infrared wavelength regions. The radiation is scattered upon impact with the material. The scattered radiation may be classified as elastically



scattered and inelastically scattered radiation. The inelastically scattered radiation is referred to as Raman scatter. The wavelengths and intensities of the Raman scatter make up the Raman spectrum. It is the Raman spectrum that provides chemical, structural and other information about the irradiated material.

5 The present invention utilizes data derived from in-situ Raman sampling of reactor constituents in the liquid phase of a slurry olefin polymerization reactor. Such data includes properties and concentrations of reactor constituents. This data is used to control the polymerization reaction and final polymer product properties, such as melt flow rate, comonomer content, and the like. The
10 polymerization reaction control is achieved, for example, by metering the flow of reactor constituents into the reactor in response to the Raman sampling data. These and other details of the present invention will be more fully described by reference to the accompanying Figures and the following discussion.

Turning now to Figure 1, a slurry loop reactor plant 100 is schematically
15 illustrated. The slurry loop reactor plant 100 includes a slurry loop reactor vessel, portions of which are designated by reference numbers 102a and 102b, an analyzer system 104, a reactor control system 106 and a reactor constituent feed source 108. An example of a suitable reactor control system 106 is more fully described in U.S. Patent No. 5,682,309 which is incorporated by reference herein
20 in its entirety.

Briefly, the reactor control system 106 controls the slurry loop reactor plant processes. These processes include (i) manipulated variables, such as for example, hydrogen feed flow rate, total feed rate and catalyst flow rate and (ii)
25 control variables, such as, for example, melt flow ratio, ethylene content, and product rate. The reactor control system 106 includes a processor, sensors and sensor circuitry (not shown). The sensors and sensor circuitry provide data, such as measures of the control variables. The processor provides memory for storing data, such as correction time constants, upper and lower limits for control variables and generates signals responsive to sensor data and limits data. Such
30 signals generated by the reactor control system 106 and conveyed by conduit 105

9

to the reactor constituent feed source 108 can influence the metering of reactor constituents from the reactor constituent feed source 108 through conduit 107 and into the slurry loop reactor vessel 102b.

The analyzer system 104 includes an in-situ probe 139, such as a fiber optic probe, secured to the reactor vessel 102a, a radiation source 112, such as a laser, connected to the probe 139 by a conduit 114, such as a fiber optic cable. Another conduit 116, such as a fiber optic cable, connects the probe 139 to a spectrum converter 118, such as a Raman spectrum converter. The spectrum converter 118 is connected via conduit 120 to an analyzer 122, such as a Raman analyzer. The analyzer 122 is connected via conduit 124 to the reactor control system 106.

The probe 139 includes a center radiation transmission conduit (not shown), such as a fiber optic cable, for conducting radiation energy from the radiation source 112 into the reactor vessel 102 and ultimately for irradiating one or more reactor constituents. Surrounding the center conduit is a plurality of receiving conduits (not shown), such as a plurality of fiber optic cables, for receiving radiation scattered by at least one of the irradiated reactor constituents. The receiving conduits also convey the scattered radiation to the spectrum converter 118.

In the operation of the present invention, laser light from irradiation source 112 is delivered via an optical fiber within conduit 114 to an optical fiber within the center radiation transmission conduit which is in communication with the reactor constituents. Irradiation of the reactor constituents generates scattered radiation, a portion of which is collected by one or more optical fibers that form the receiving conduits. The collected scattered radiation is conveyed from the receiving conduits to the spectrum converter 118 by one or more optical fibers within conduit 116. In the spectrum converter 118, the scattered radiation is filtered by a holographic notch filter to remove unshifted radiation. A CCD (Charged Couple Device) camera records radiation intensity over a range of selected wavelengths. The selection of wavelengths is dependent, in part, on the


wavelength of the laser light irradiating the reactor constituents and the reactor constituents being investigated. The analyzer 122 receives the wavelength data from the spectrum converter 118 via conduit 120. The analyzer may be preprogrammed to examine selected wavelengths corresponding to reactor constituents that the reactor operator may desire to monitor and/or examine. For example, the wavelength shift of 4140 cm^{-1} corresponds to the dissolved hydrogen in the slurry loop reactor vessel 102. The wavelength shifts for other reactor constituents may be found in "The Handbook of Infrared And Raman Characteristic Frequencies of Organic Molecules," Daimay Lin-Vien, et al, (1991). The recorded intensities may be plotted as peaks of varying heights as a function of wavelength. Information, such as the concentration of the reactor constituent, may be estimated by calculating the area under or the height of one or more of the associated peaks. Alternatively, multivariate statistical methods, such as principle component regression or partial-least squares regressions can also be used to correlate the concentration of the reactor constituents or polymer properties to the spectral intensities. The above described irradiation/analysis cycle may be repeated between every 5 seconds to 1,000 seconds or as otherwise desired.

Data from the analyzer 122, such as the concentration of hydrogen in the liquid phase (which may also be referred to as the "dissolved hydrogen concentration"), may be conveyed via conduit 124 to the reactor control system 106. As previously described, the processor in the control system 106 can compare the preset upper and lower limits for reactor constituent concentrations and the flow of these reactor constituents into the reactor vessel 102 with the data from the analyzer 122 and adjust or meter the flow thereof accordingly.

For example, in the case of an olefin slurry loop polymerization reactor, hydrogen can serve as a polymer chain transfer agent. In this way, the molecular weight of the polymer product can be controlled. Additionally, varying the hydrogen concentration in olefin polymerization reactors can also vary the polymer melt flow rate (MFR). In some instances, customers may specify a very

narrow polymer MFR range for their product(s). The present invention allows the polymer manufacture to produce polymer having a selected MFR range. This is accomplished by knowing the relationship between hydrogen concentration and the MFR of polymers produced by a specific reactor and programming the target MFR or MFR range into the control system 106 processor. By monitoring the hydrogen concentration data generated by the analyzer system 104 and comparing this data to the upper and lower limits of the target MFR range, the flow of hydrogen into the reactor vessel 102 may be metered so that the MFR range of the polymer product may remain compliant with the target MFR range.

While the above example is specific to hydrogen concentration and polymer MFR, it will be understood by those skilled in the art that other reactor constituent properties and reactor constituent concentrations measured in the reactor vessel may also be correlated to final polymer properties. In a similar way as described above, the final polymer properties may be achieved by controlled metering of these reactor constituents into the reactor vessel 102 in response to data generated by the analyzer system in concert with an appropriately programmed processor (programs which are readily available or which are known to or can be created by those skilled in the art). For example, in the article titled, "Modelling Of The Liquid Phase Polymerization Of Olefins In Loop Reactors" by Zacca and Ray which appears in Chemical Engineering Science, Vol. 48, No. 22 page 3743) and the article entitled "Moving-Horizon State Estimation Applied to an Industrial Polymerization Process" by Louis P. Russo and Robert E Young which appears in the American Control Conference Proceedings, 1999, San Diego, CA, both of which are incorporated by reference herein in their entirety, mathematical models are provided for describing the dynamics of the polymerization of olefins in a slurry loop reactor. One skilled in the art will recognize that the teachings in these articles are not catalyst specific and are applicable for use with the present invention as well a for use in describing and/or understanding the dynamics of a slurry loop reactor employing, for example, one or more metallocene catalysts systems.



Turning now to Figure 2, a fiber optic probe assembly 126 secured to the reactor vessel wall 128 by engaging flanges 129 is illustrated. The fiber optic probe assembly 126 extends for a distance into the interior 130 of the reactor vessel 102a. The fiber optic probe assembly 126 includes a probe housing 132 having a first end 134 and second end 136 and portions defining a probe channel 138 (illustrated in ghost) sized for slidably receiving a probe 139, desirably formed from stainless steel. The probe 139 includes a fiber optic channel 155 (Figure 3) sized for receiving the center fiber optic transmission conduit and the fiber optic receiving conduits described above. The transmission and receiving fiber optic conduits are generically illustrated in Figure 2 by the structure identified by the reference number 143. The center fiber optic transmission conduit and the fiber optic receiving conduits 143 terminate at the probe tip 152 (Figure 3). The probe channel 138 extends substantially the length of the probe housing 132 between the first and second ends 134 and 136, respectively. Between the first and second ends 134 and 136, respectively, a pair of ball valves 140a and 140b are secured to the probe housing 132 and are aligned with the probe channel 138. The probe 139 enters the probe housing 132 through a re-sealable fitting 141. The probe 139 may be extended, retracted or selectively positioned within the probe channel 138 by a probe insertion assembly 142.

The probe insertion assembly 142 is secured to the second end 136 of the probe housing 132. The probe insertion assembly 142 includes a guide rod 144, a plate 146 moveably secured to the guide rod 144 and to a threaded rod 148 for selectively positioning and securing the plate 146 along the length of the guide rod 144. A connection 150 secures one end of the probe 139 to the plate 146.

While the analyzer system 104 does not require continuous and/or simultaneous correlation or calibration of the reactor constituent data with data obtained from an irradiated reference material, calibration of the analyzer system, from time to time, may be desirable. Calibration of the analyzer system 104 may be preformed by positioning the probe tip 152 (Figure 3) between ball valve 140b and the second end 136 of the probe housing 132. In this way, the ball valves

JB

140a and 140b may be rotated to interrupt contact between the reactor constituents and the irradiating and collecting ends of the transmission and receiving conduits 143. The ball valves 156a and 156b may be rotated to isolate a flow of purging fluid, such as liquid propylene, in a conduit 158 from entering a calibration material conduit 160. The calibration material conduit 160 communicates with a calibration material source 162 and a portion of the probe channel 138 that is defined by the portion of the probe housing 132 between the ball valve 140b and the second end 136. In this way, a reference material may be segregated from the reactor constituents when the analyzer system 104 is being calibrated or its accuracy checked.

Calibrating the analyzer system 104 may be performed by contacting the irradiating and collecting ends of the transmission and receiving conduits 143 at the probe tip 152 (Figure 3) with a quantity of the reference material. The reference material is irradiated and the energy scattered by the reference material is collected. The reference material data is processed in the same manner as the reactor constituent data except that the reference data obtained during calibration is compared to known data for the reference material.

Selection of the reference material for calibration may, in some instances, depend upon the reactor constituent(s) being investigated and/or monitored. For example, as described above, when monitoring the concentration of hydrogen in the reactor vessel for purposes of controlling the MFR of polymer product, it may be desirable to select reactor grade hydrogen as one of the reference materials to calibrate the analyzer system 104.

Referring now to Figure 3, an enlarged view of a portion of the probe 139 which rests in the probe channel 138 adjacent the first end 134 is illustrated. Slightly rearward of the probe tip 152 in a direction towards the second end 136 (not shown), the cross sectional area of the probe 139 increases in a flared section 154. The flared section 154 facilitates the sealing of the probe 139 within the probe channel 138. The fiber optic channel 155 extends the length of the probe

14

139 and is sized for receiving the fiber optic transmitting and receiving conduits 143.

When the analyzer system 104 is used for investigating and/or monitoring the concentration of hydrogen in a slurry loop, propylene polymerization reactor, specific, non-limiting examples of suitable analyzer system components include: a Kaiser HoloProbe Process Raman Analyzer, manufactured by Kaiser Optical Systems, Inc. of Ann Arbor, MI, a Visible 400mW, 532nm solid state Diode-pumped frequency YAG laser, manufactured by Coherent, Inc and supplied by Kaiser Optical Systems, and a Visonex Captron Probe, manufactured by Visionex, Atlanta GA.

Additionally, it is desirable, but not necessary, that the fiber optic probe assembly 126 meet the following minimum particular specifications: operating conditions of 600 psig (41.36 bars) and 165°F (73.9°C), design conditions of 700 psig (48.25 bars) and temperatures in the range of from -49°F (35°C) to 302°F (150°C). Furthermore, it is desirable that the optic probe assembly 126, including fiber optics, epoxy and related components, sustain without loss of integrity: (i) exposure to light hydrocarbons and TEAL ($(C_2H_5)_3Al$) at concentration in the range of from 0.01 to 500 ppm; (ii) thermal cycling from 0°C to 100°C over a one hour period. It is also desirable that the fiber optic cables (the transmission conduit and the receiving conduits) be secured within and throughout the length of the probe 139.

The above description illustrates the use of an analyzer system employing a single probe for analyzing one or more reactor constituents. It will be understood by those skilled in the art that the analyzer system may be configured to include more than one probe which may be located at one or more locations along the reactor vessel. Additionally, in the case of multistage reactors, the analyzer system may be configured to include probes located at one or more locations along one or more reactors. In this way, one or more reactor constituents may be analyzed at one or more locations within the overall process and particularly, the overall olefin polymerization process.

15

Examples

The following examples are presented to illustrate the foregoing discussion. Although the examples may be directed to certain embodiments of the present invention, they are not to be viewed as limiting the invention in any specific respect. The equipment used and the experimental procedure employed to obtain the data in the following tables and figures are outlined below.

Equipment

The apparatus used in the hydrogen concentration and polymer properties experiments is schematically illustrated in Figure 4. The equipment consisted of the following major components:

A Kaiser Holoprobe 532 Raman Spectrometer

A 200 mW 532 nm Solid State YAG Laser

Visionex Captron Probe with integral 532 nm notch filter

Low-Hydroxyl Silica Fiber Optic Cables

A Gateway GS-400 Computer used to control spectrometer and record spectra.

Stirred Vessel with Pressure Measurement/Control

Experimental Procedure

The Hydrogen concentration experiment was designed to provide a simulation of slurry loop reactor conditions. Pentane was substituted for propylene because of simpler handling requirements. Hydrogen concentration experiments were conducted in order to determine the sensitivity level of the hydrogen measurement. The polymer properties experiment simply consisted of acquiring Raman spectra of polypropylene granules. They are described in more detail below.

Weighed amounts of polypropylene granules and pentane were added to the vessel to create a slurry of known concentration. The vessel was then sealed, purged with nitrogen, and agitation was established. Hydrogen was then added to

112

the system to achieve desired system pressure. At each pressure level, Raman spectra were collected and recorded in a manner similar as described above. The system pressure was used to estimate hydrogen concentration. This was repeated for several slurry concentration levels.

The polymer property experiment utilized the Raman probe, spectrometer and related equipment, but consisted of simply placing the Raman probe in a plastic bag containing Polypropylene granules and acquiring spectra.

Example 1 - Hydrogen Concentration

Hydrogen exhibits a peak at a Raman shift of 4140 cm^{-1} . This hydrogen peak along with two peaks from the pentane solvent (at 1361 cm^{-1} and 2735 cm^{-1}) were used for the hydrogen concentration measurement. These are shown in Figures 5a and 5b.

The pentane peaks were used in order to establish the hydrogen measurement as a ratio against other major components. This method provides a means of correcting the hydrogen prediction for changes in scattering intensity caused for example, by changing polymer concentration. Desirably, in polyolefin field reactors, measurement of hydrogen will also use one or more bands from the monomer and polymer. The area under each band (or peak) was integrated using Grams 32 data analysis software. The peak areas were used to develop a hydrogen concentration prediction equation of the form:

$$H_2 (\text{ppm}) = a_1 * A_{4138} + a_2 * (A_{4138}/A_{1361}) + a_3 * (A_{4138}/A_{2735}) + C$$

where: A_n are the Peak Areas

$a_1..a_3$ are the regression coefficients

C is a constant

A plot of estimated hydrogen concentration versus Raman predicted hydrogen is shown in Figure 6.

Example 2 - Hydrogen Measurement Sensitivity

17

The determination of hydrogen measurement sensitivity was conducted using a certified blend of hydrogen in propylene liquid. Several Raman spectra were collected, and the repeatability of the analysis was used to establish the lower limit of hydrogen measurement sensitivity. This value is assumed to be the upper level of sensitivity to hydrogen as the presence of polymer granules will have a negative impact on the measurement. The impact of polymer granules on sensitivity to hydrogen was evaluated by observing the impact on a surrogate compound (acetonitrile) in a pentane/polypropylene slurry. A surrogate in pentane was used to simplify handling in the laboratory. It is believed that the results for hydrogen in propylene will be similar. The calculations are shown below:

Calculation Of Measurement Sensitivity/Repeatability

Table 1 reports the results from 240 parts per million ("ppm") Hydrogen in Propylene repeatability test.

Table 1

No.	Peak Ht.
1	101.05
2	103.39
3	108.54
4	110.18
5	112.24
6	114.84
7	108.46
Avg.	108.39
Stdev.	4.81

An estimate of the repeatability in ppm H₂ (also the standard deviation in ppm of H₂) of the instrument can be made using the standard deviation of the seven sequential measurements.

$$\begin{aligned}\text{Repeatability (ppm H}_2\text{)} &= (4.81/108.39) \times 240 \text{ ppm} \\ &= 10.6 \text{ ppm H}_2\end{aligned}$$

The minimum detectable limit can be estimated at three times the standard deviation in ppm of H₂ of the measurement.

$$\text{Minimum Detectable} = \sim 3 \times \text{Std. Dev. in ppm of H}_2$$

As such, the minimum detectable limit in propylene liquid using the above equipment configuration equals approximately 33 ppm H₂

Impact of Polymer Slurry on H₂ Measurement Sensitivity/Repeatability

Figure 7 illustrates the expanded spectra of acetonitrile in a polypropylene/pentane slurry at several polymer concentrations. As can be seen from Figure 7 above, the acetonitrile peak at 50% polypropylene slurry is approximately 50% the size of the peak with no polymer present. Assuming that a 50% slurry similarly depresses the hydrogen peak size by 50 %, then the estimated hydrogen sensitivity is as follows:

Taken from above that Hydrogen measurement repeatability/sensitivity in propylene liquid is 10.6/ 33 ppm H₂, then:

$$\text{H}_2 \text{ Repeatability (at 50\% polymer)} = 10.6 \text{ ppm} / 0.5 = 22 \text{ ppm H}_2$$

$$\text{H}_2 \text{ Sensitivity (at 50 \% polymer)} = 33 \text{ ppm} / 0.5 = 66 \text{ ppm H}_2$$

Example 3 - Polymer Properties Measurement

The measurement of polypropylene properties such as MFR was based on the correlation of Raman spectra collected from polypropylenes with known (as determined by a primary method such as NMR or a Rheometer) properties.

Spectral Modeling for MFR

Each individual spectra taken is represented by an array of approximately 4400 frequency vs. intensity values. (1 row with 4400 columns). For a model set with 20 samples, this produces a data array with a dimension of 20 rows by 4400 columns.

19

To successfully produce a prediction model from this data array, it is necessary to first reduce the size of the data set. This was accomplished using Principal Components Analysis (PCA). PCA reduces this large data set to a number of covariant orthogonal vectors referred to as a Principal Components or PCs'. Each PC contains the covariant (correlated) data contained in the data set. The first PC represents the highest valued covariant behavior, with each PC in descending order representing lower intensity (intensity value) information

Each spectra is then assigned a "score" for each PC. The score is the amount of each principal component found in the spectra. The scores represent the independent variables that are regressed against properties of interest in order to produce a prediction model. The regression of the scores produced a "regression vector" with a coefficient for each intensity value utilized.

The form of the predictive equation is :

$$\text{predicted value} = k_{\lambda_1} A_{\lambda_1} + k_{\lambda_2} A_{\lambda_2} + \dots + k_{\lambda_n} A_{\lambda_n}$$

where: A_{λ_n} is the absorbance at the n^{th} frequency

k_{λ_n} is the regression coefficient for the n^{th} frequency

MFR Prediction

MFR prediction models were developed on polypropylene granules samples previously characterized in the lab in accordance with ASTM D-1238-95 Procedure B. It has been found that it is necessary to create separate prediction models for homopolymers and copolymers.

Both the homopolymers and copolymer models had the following characteristics: (i) 271cm^{-1} to 1913cm^{-1} Raman shift, (ii) Developed by PCA/PLS and (iii) 4 Principal Components used in regression.

A Raman spectrum of polypropylene granules is shown below in Figure 8. The frequency region used is illustrated on the plot.

Figure 9 illustrates a parity plot of Raman predicted MFR versus Lab MFR. The Standard Error of Cross Validation (SEV) is as follows:

Homo-polymers: 0.32 MFR

Copolymers: 0.41 MFR

As can be seen from the Figure 9, spectroscopic analysis, and particularly Raman analysis can be used to predict MFR of polypropylene granules.

While the present invention has been described and illustrated by reference to particular embodiments, it will be appreciated by those of ordinary skill in the art that the invention lends itself to many different variations not illustrated herein. For these reasons, then, reference should be made solely to the appended claims for purposes of determining the true scope of the present invention.

Example 4 - Raman Spectroscopy Sensitivity to Ethylene and 1-Hexene In a Simulated Slurry Loop Reactor

The apparatus used in this simulation include of the following major components:

A Kaiser HoloLab 5000 Raman Spectrometer

A NIR 785nm/250mW External Cavity Wavelength Stabilized Laser Diode

A imaging style optic, immersion probe with holographic probe head filter (Figure 16), available from Kaiser Optical Systems, probe head model number HFPH-FC-S-785, immersion optic model number IMO-H-0.1

A fiber optic cable (4 fibers)

A PC with software to control spectrometer and collect/analyze spectra

A stirred vessel with pressure measurement

Experimental Procedure

The experiment simulated slurry loop reactor conditions. Isopentane was substituted for the isobutane diluent for ease of handling. The vessel was first charged with isopentane and high-density polyethylene granules at a ratio similar to slurry loop reactor conditions. The vessel was then sealed and stirred

21

throughout the experiment. To this slurry, aliquots of 1-hexene were added volumetrically. Spectra were collected before and after each addition of hexene.

After completing the 1-hexene additions, ethylene was then added to the slurry. Ethylene gas was feed to the vessel and quantitated by weighing the ethylene delivery cylinder. The ethylene gas pressurized the reaction vessel and was forced into solution by pressure and stirring agitation.

1-hexene exhibits a peak at a Raman shift of 1640 cm^{-1} . Ethylene exhibits a peak at a Raman shift of 1620 cm^{-1} . Figure 10 illustrates the expanded spectra of these peaks in the slurry system. These peaks were used for the concentration measurements. The relationship between the peak height of the 1-hexene peak versus hexene concentration is shown in Figure 11. The relationship between the peak height of the ethylene peak versus ethylene concentration is shown in Figure 12.

It is clear, in view of the Figures 10-12 and the above discussion, that ethylene and 1-hexene concentrations at in typical slurry loop reactor environment can be determined by Raman spectroscopy.

Example 5 - On-Line Validation of Raman Spectroscopy for Ethylene and Polyethylene Copolymer. Prophetic Example of Hexene Concentration Measurements

The apparatus used in Example 5 include of the following major components:

A Kaiser HoloLab 5000 Raman Spectrometer

A NIR 785nm/250mW External Cavity Wavelength Stabilized Laser Diode

A imaging style optic, immersion probe with holographic probe head filter, available from Kaiser Optical Systems, probe head model number HFPH-FC-S-785, immersion optic model number IMO-H-0.1

A 100 meter, jacketed fiber optic cable (4 fibers)

A PC with software to control spectrometer and collect/analyze spectra

A commercial slurry-loop, polyethylene reactor system

Experimental Procedure

5 The imaging probe was inserted directly into the slurry-loop reactor. Spectrum was collected as the reacting slurry flowed past the imaging probe tip. Figure 13 exhibits the expanded Raman spectra collected from the slurry polyethylene copolymer reaction system.

10 Ethylene Concentration Measurements

 Ethylene concentrations were measured during a typical commercial polyethylene production run in the above commercial slurry loop reactor system operated at 550 psi, approximately 100 degrees C, with ethylene as the primary monomer and 1-hexene as the comonomer. For the analysis, the area of the
15 known peak for the ethylene was divided by the area of an isolated isobutane peak (the reference peak). The result is the ethylene peak ratio. The peak ratio results were then compared to the results from the current ethylene measurement produced by a downstream gas chromatograph. Figure 14 shows the relationship between the ethylene peak ratio and the gas chromatograph ethylene
20 concentration measurement.

 Based upon the peak ratio technique, the ethylene concentration prediction equation is as follows:

$$\text{Ethylene (wt\%)} = X * (A_{1620} / A_{796}) + C$$

25

X = slope of linear regression

An = peak areas

C is a constant

23

It is clear, in view of Figure 13 and 14 and the above discussion, that the ethylene concentration may be predicted within acceptable variations within a commercial loop slurry reactor.

Hexene Concentration Measurements

Due to reaction conditions, the 1-hexene peak at a Raman shift of 1640 cm⁻¹ is generally not acceptable for the peak ratio technique. However, spectral modeling can offer a solution. For example, each spectra may be treated as an array of Raman shift (frequency) versus intensity values. The arrays of values from multiple spectra can be assembled to produce the matrix for chemometric analysis. Partial Components Analysis (PCA) and Partial Least Squares (PLS) can be used for the model creation. Using the information in the spectral range from 1580cm⁻¹ to 1700cm⁻¹, an effective model for hexene concentration (as indicated by the downstream gas chromatograph) can be produced.

Polyethylene Copolymer Concentration Measurements

Polyethylene copolymer concentrations were measured during a typical commercial polyethylene production run in the above commercial slurry loop reactor system operated at 550 psi, approximately 100 degrees C, with ethylene as the primary monomer and 1-hexene as the comonomer. Figure 15 illustrates a correlation between the Raman polyethylene copolymer peak ratio and the slurry density/polyethylene copolymer concentration in the commercial slurry loop system.

Based upon the peak ratio technique, the polyethylene copolymer concentration at the probe tip can be calculated. This prediction can be compared to the results of the reactor's on-line nuclear density analysis instrumentation. The prediction equation is as follows:

$$\text{Slurry Density (polymer concentration)} = X * (A_{1295} / A_{796}) + C$$

24

X = slope of linear regression

A_n = peak areas

C is a constant

5 While the present invention has been described and illustrated by
reference to particular embodiments, it will be appreciated by those of ordinary
skill in the art that the invention lends itself to many different variations not
illustrated herein. For these reasons, then, reference should be made solely to the
appended claims for purposes of determining the true scope of the present
10 invention.

 Although the appendant claims have single dependencies in accordance
with U.S. patent practice, each of the features in any of the appendant claims can
be combined with each of the features of other appendant claims or the main
claim.



CLAIMS

1. A method of olefin polymerization in a slurry reactor containing reactor constituents having a liquid phase comprising:
- 5 irradiating in-situ the reactor constituents;
measuring scattered energy from the irradiated reactor constituents;
determining a concentration of one or more reactor constituents;
and
metering a flow of at least one reactor constituent into the reactor in
10 response to the determined concentration.
2. The method of claim 1 wherein the determining step is performed on at least one reactor constituent in the liquid phase.
- 15 3. The method of claim 2 wherein at least one of the reactor constituents in the liquid phase is hydrogen.
4. The method of claim 1 wherein the reactor constituents are circulated in the reactor.
- 20 5. A method of polymerizing a polyolefin in a slurry reactor containing reactor constituents comprising:
irradiating in-situ a slurry;
measuring scattered energy from the slurry;
25 determining from the measured scattered energy a concentration of one or more reactor constituents;
comparing the concentration of one or more reactor constituents with one or more values that correlate to one or more selected physical properties of the polyolefin; and

2A

metering, in response to the comparing step, a flow of one or more reactor constituents into the reactor.

6. The method of claim 5 wherein the determining step is performed on at least one reactor constituent in a liquid phase of the slurry.

7. The method of claim 6 wherein at least one of the reactor constituents in the liquid phase is hydrogen.

8. The method of claim 5 wherein at least one of the selected physical properties of the polyolefin is a melt flow rate.

9. The method of claim 8 wherein the flow of one or more of the reactor constituents into the reactor is metered such that the polyolefin produced may be defined, in part, by a melt flow rate value within a selected melt flow rate range.

10. A method of polymerizing a polyolefin in a reactor containing reactor constituents in liquid phase comprising:

irradiating in-situ the liquid phase;

measuring the frequencies scattered by the irradiated liquid phase;

determining from the measured frequencies a concentration of one or more reactor constituents;

comparing the concentration of one or more reactor constituents with one or more values that correlate to one or more selected physical properties of the polyolefin; and

metering, in response to the correlating step, a flow of one or more reactor constituents into the reactor.

11. The method of claim 10 wherein one of the selected physical properties of the polyolefin is a melt flow rate value within a selected melt flow rate

26

range and wherein the flow of one or more reactor constituents into the reactor is metered such that the polyolefin produced may be defined, in part, by a melt flow rate value within the melt flow rate range.

12. A method of polymerizing a polyolefin in a slurry loop reactor containing reactor constituents, including hydrogen, in a liquid phase comprising:

irradiating in-situ the liquid phase;

measuring the frequency scattered by the hydrogen in the liquid phase;

determining the concentration of hydrogen in the liquid phase from the measured frequency;

comparing the concentration of hydrogen to a hydrogen concentration value that correlates to a melt flow rate value within a selected melt flow rate range; and

metering, in response to the concentration of hydrogen measured, a flow of the hydrogen into the reactor such that the polyolefin produced may be defined, in part, by a melt flow rate value within the selected melt flow rate range.

13. A method of polymerizing a polyolefin in a slurry reactor containing reactor constituents comprising a liquid phase and a solid phase forming a slurry reaction mixture, said method comprising:

irradiating in-situ at least a portion of the slurry reaction mixture;

measuring scattered energy from the slurry;

determining from the measured scattered energy a concentration of one or more reactor constituents;

controlling the flow of one or more reactor constituents into the reactor based on the concentration of one or more reactor constituents.

29

14. The method of claim 13 wherein the one or more reactor constituents in said determining step are the same as said one or more reactor constituents in the controlling step.
- 5 15. The method of claim 13 wherein at least one of the one or more reactor constituents in said determining step is different from said one or more reactor constituents in the controlling step.
- 10 16. The method of claim 13 wherein the concentration determined is that of ethylene in the liquid phase of a slurry reaction mixture.
- 15 17. The method of claim 13 wherein the measured concentration of ethylene and at least one other alpha-olefin copolymer in the liquid phase of a slurry reaction mixture are used to control the ratio of one or more reactor constituents into the reactor.
- 20 18. The method of claim 13 wherein the measured concentration of polymer in the solid phase of a slurry reaction mixture is used to control the flow of one or more reactor constituents into the reactor.
19. The method of claim 13 wherein the flow controlled is diluent.

30

RAMAN ANALYSIS SYSTEM FOR
OLEFIN POLYMERIZATION CONTROL

ABSTRACT

5

10

Method of olefin polymerization in a reactor, such as a slurry loop olefin polymerization reactor, is provided. The method includes conducting in-situ, real time spectroscopic analysis of one or more reactor constituents. The reactor constituents analyzed may be present in the reactor in either the liquid phase or the solid phase, or both. In response to the measured in-situ values, one or more reactor constituents may be metered into the reactor.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189

Fig. 1

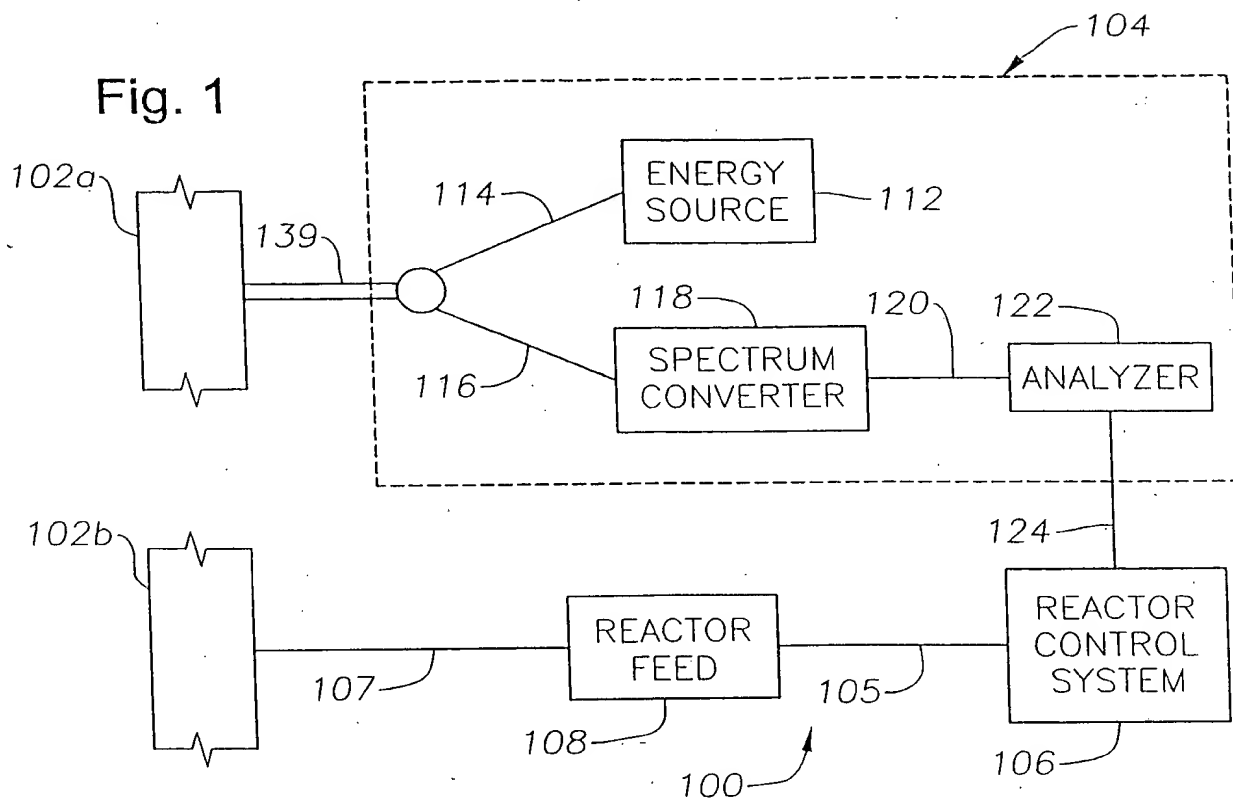


Fig. 2

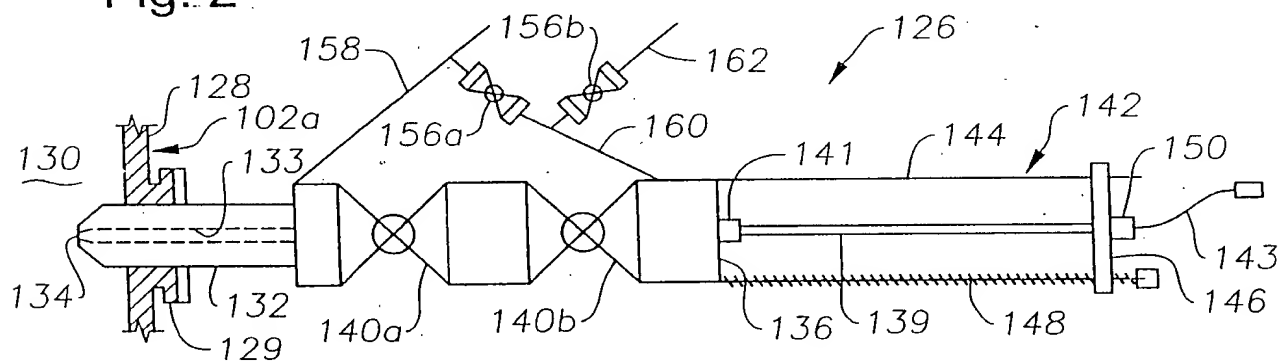


Fig. 3

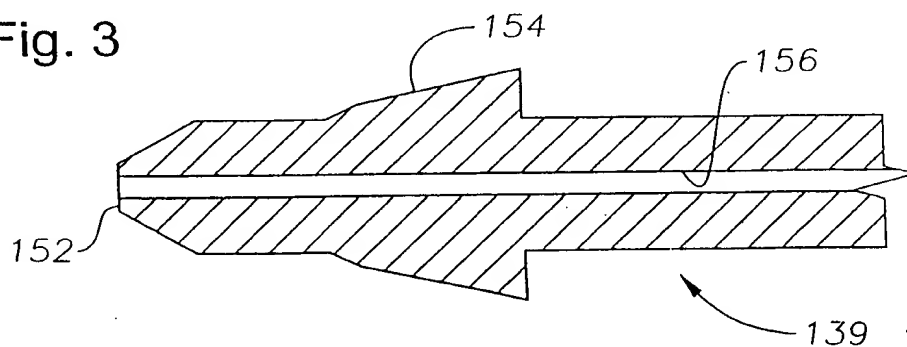


Fig. 4

HYDROGEN IN POLYPROPYLENE SLURRY EXPERIMENTAL SETUP


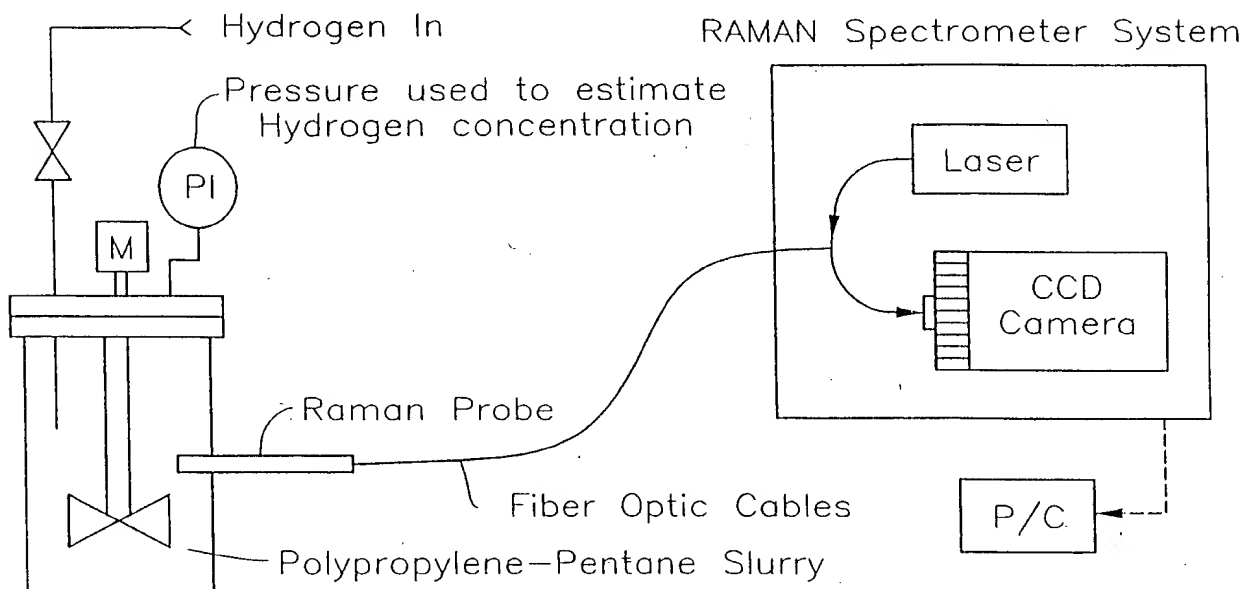


Fig. 5a

Raman Spectra of Pentane/Polypropylene Slurry

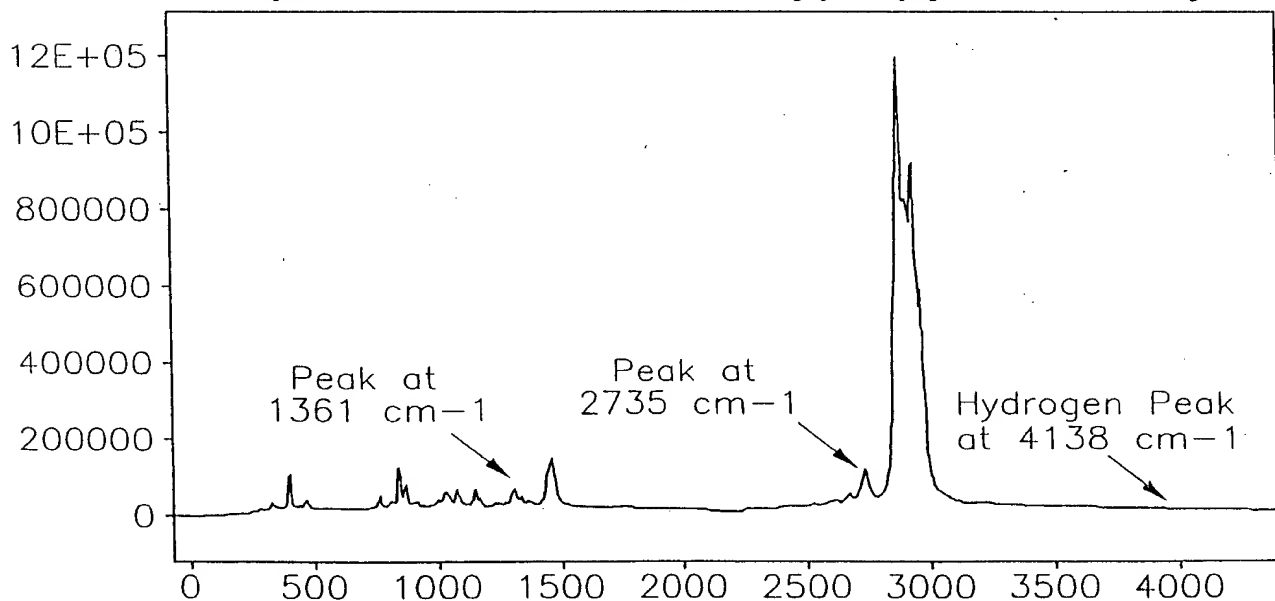

Arbitrary Y/Raman Shift (cm⁻¹)

File#1=V5H23001

0 psi, Fresh Pentane, vex 2a probe,
24.5 °C, polymer sample 310020,
2.34 MFR, appr

Overlay Z-Zoom CURSOR

12/16/97 2:41 PM Res=None

Fig. 5b

Expanded View of Hydrogen Peak Area


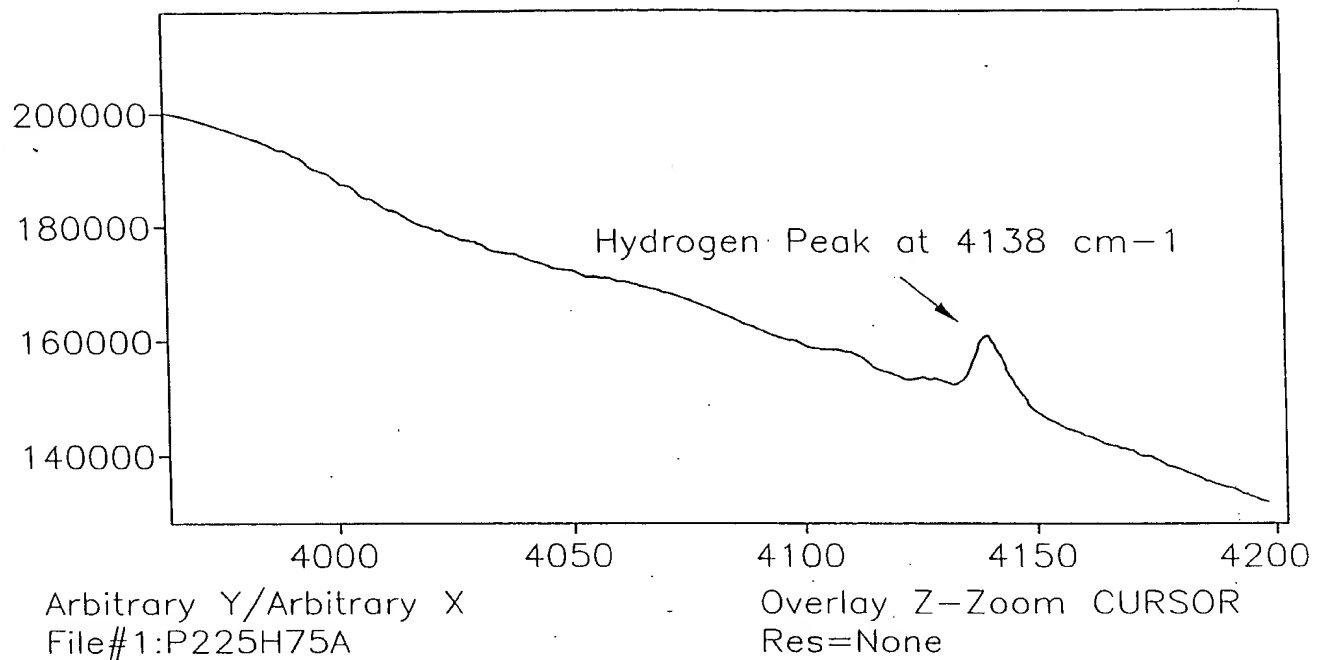


Fig. 6


Estimated (by press.) Hydrogen Conc. vs. Predicted Hydrogen Conc. for 25% and 35% wt PP Slurry

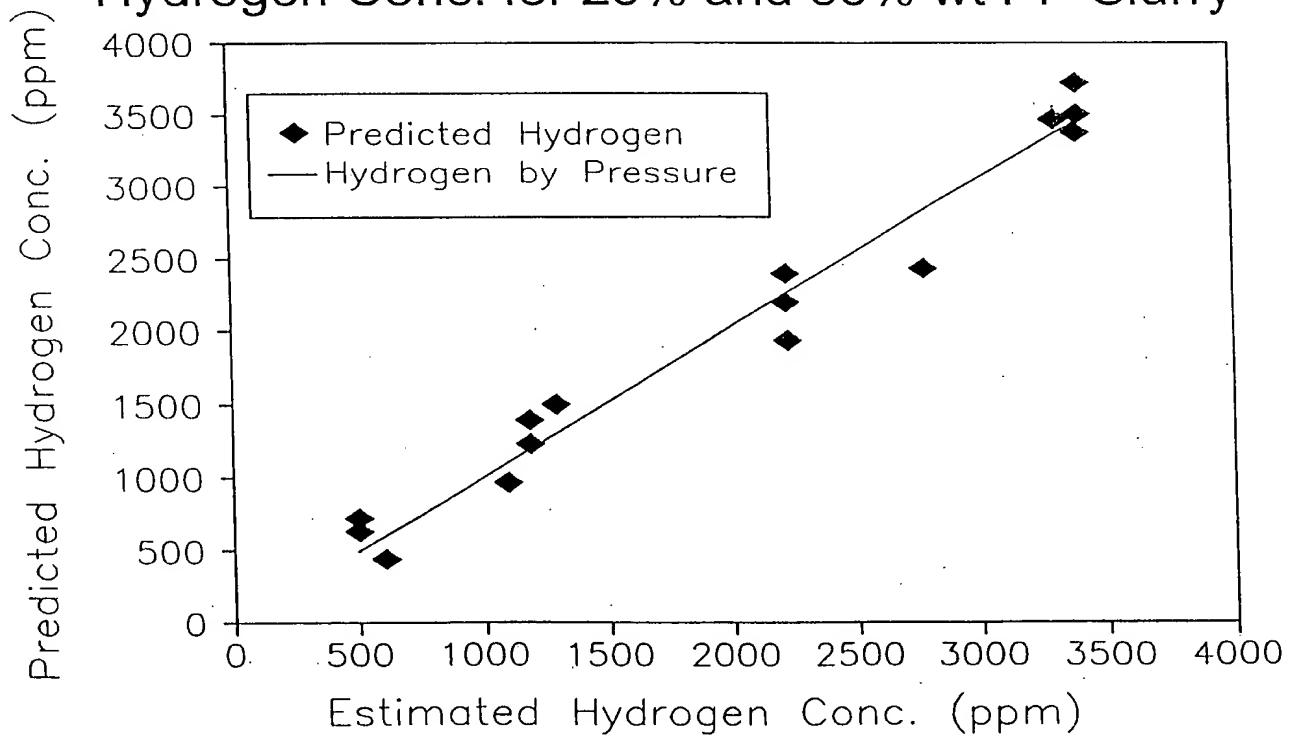

4/5

Fig. 7

Expanded Spectra of acetonitrile in pentane,
showing impact of polymer on peak size

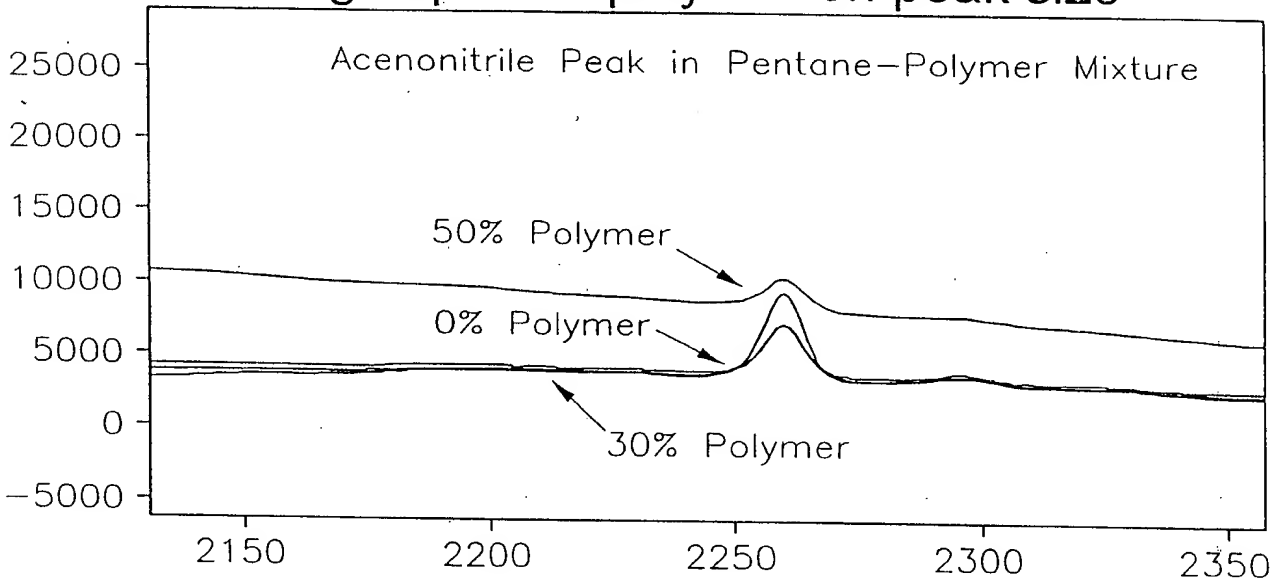


Arbitrary Y/Raman shift (cm-1)
File #5=AN_6015
Acetonitrile in pentane, 30% polymer,
vex 1a probe; glass vessel

Overlay Y-Zoom CURSOR
12/18/97 12:04 PM
Res=None

Fig. 8

Raman Spectrum of Polypropylene Granules

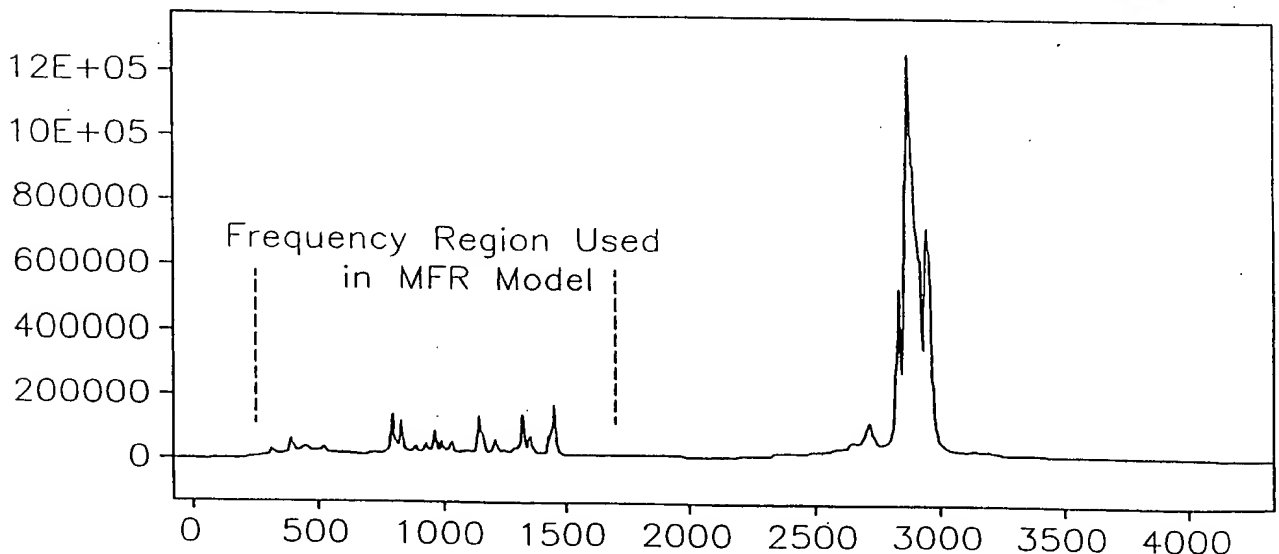



Arbitrary Y/Raman Shift (cm-1)
File #1=POLY0023
sample 23

Overlay Y-Zoom CURSOR
12/17/97 4:09 PM Res=None

5/5


Fig. 9

Raman Predicted vs. Lab MFR

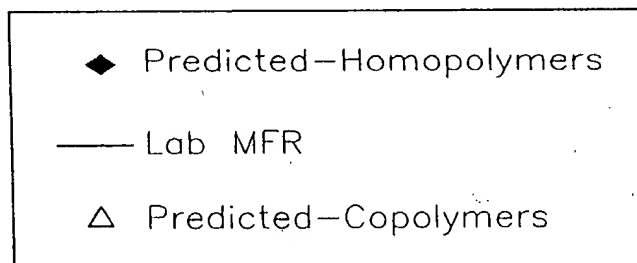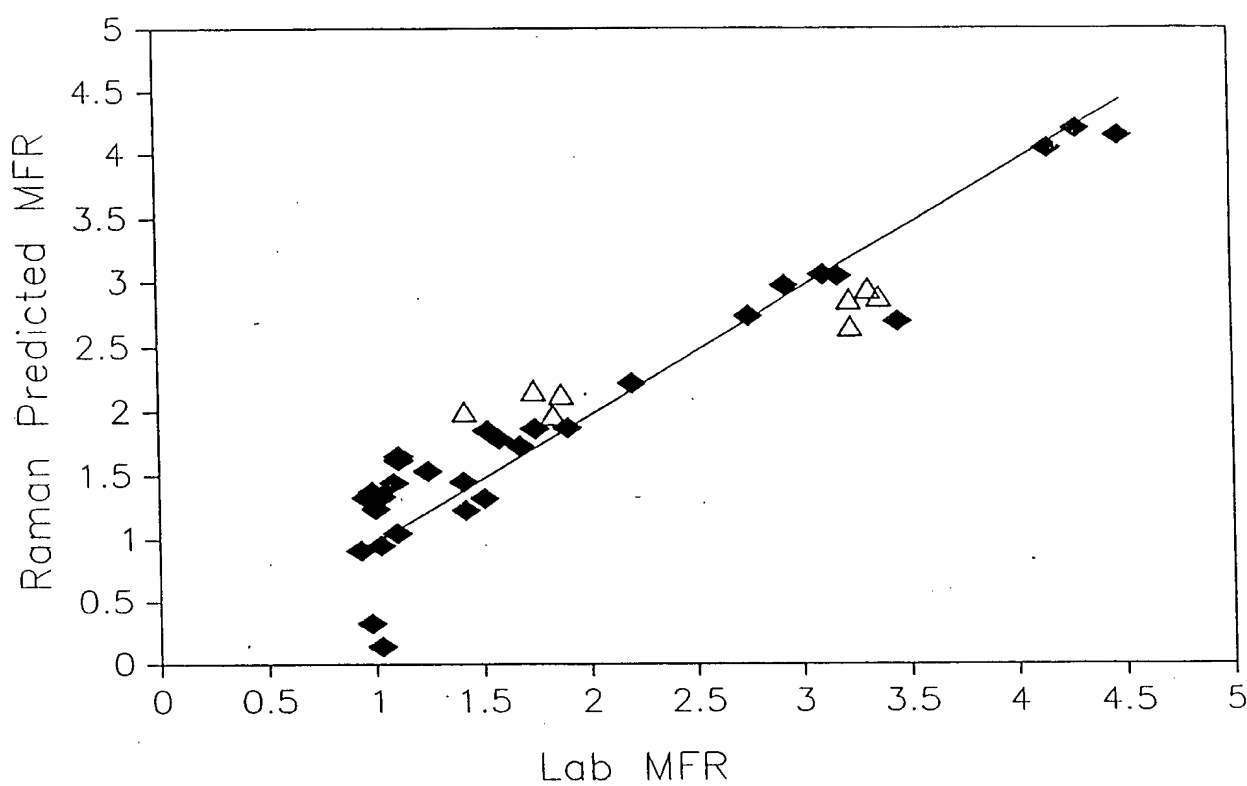


PRINT OF DRAWINGS
AS ORIGINALLY FILED

Figure 10

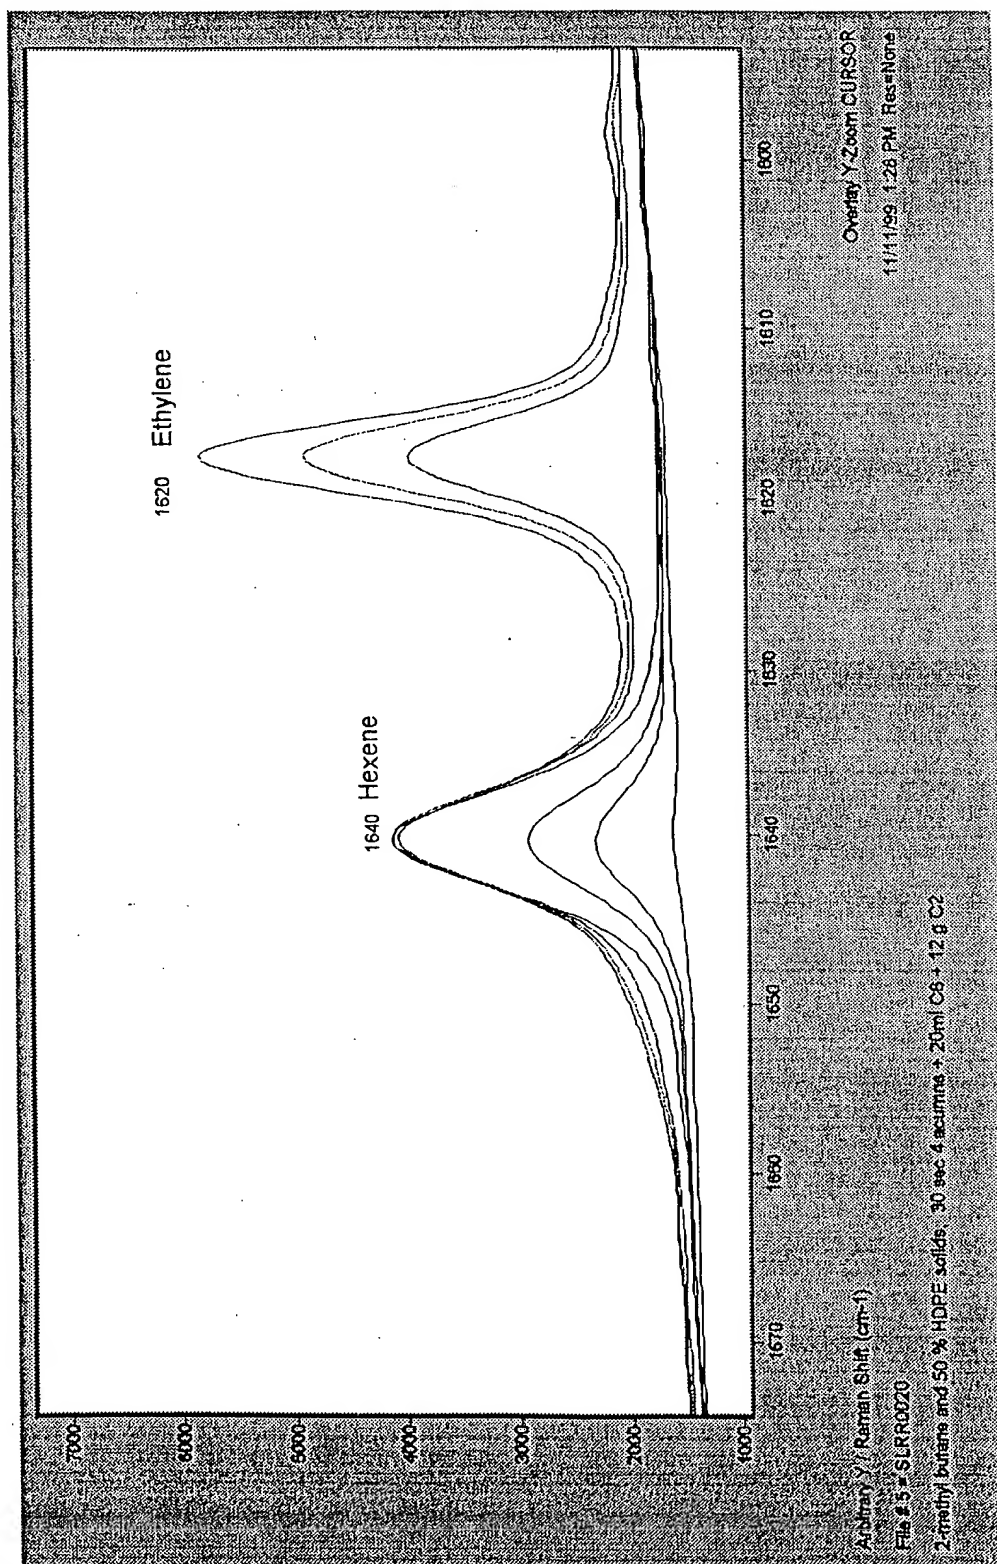



[illegible]

Ethylene Concentration by raw peak height at 1618 /cm

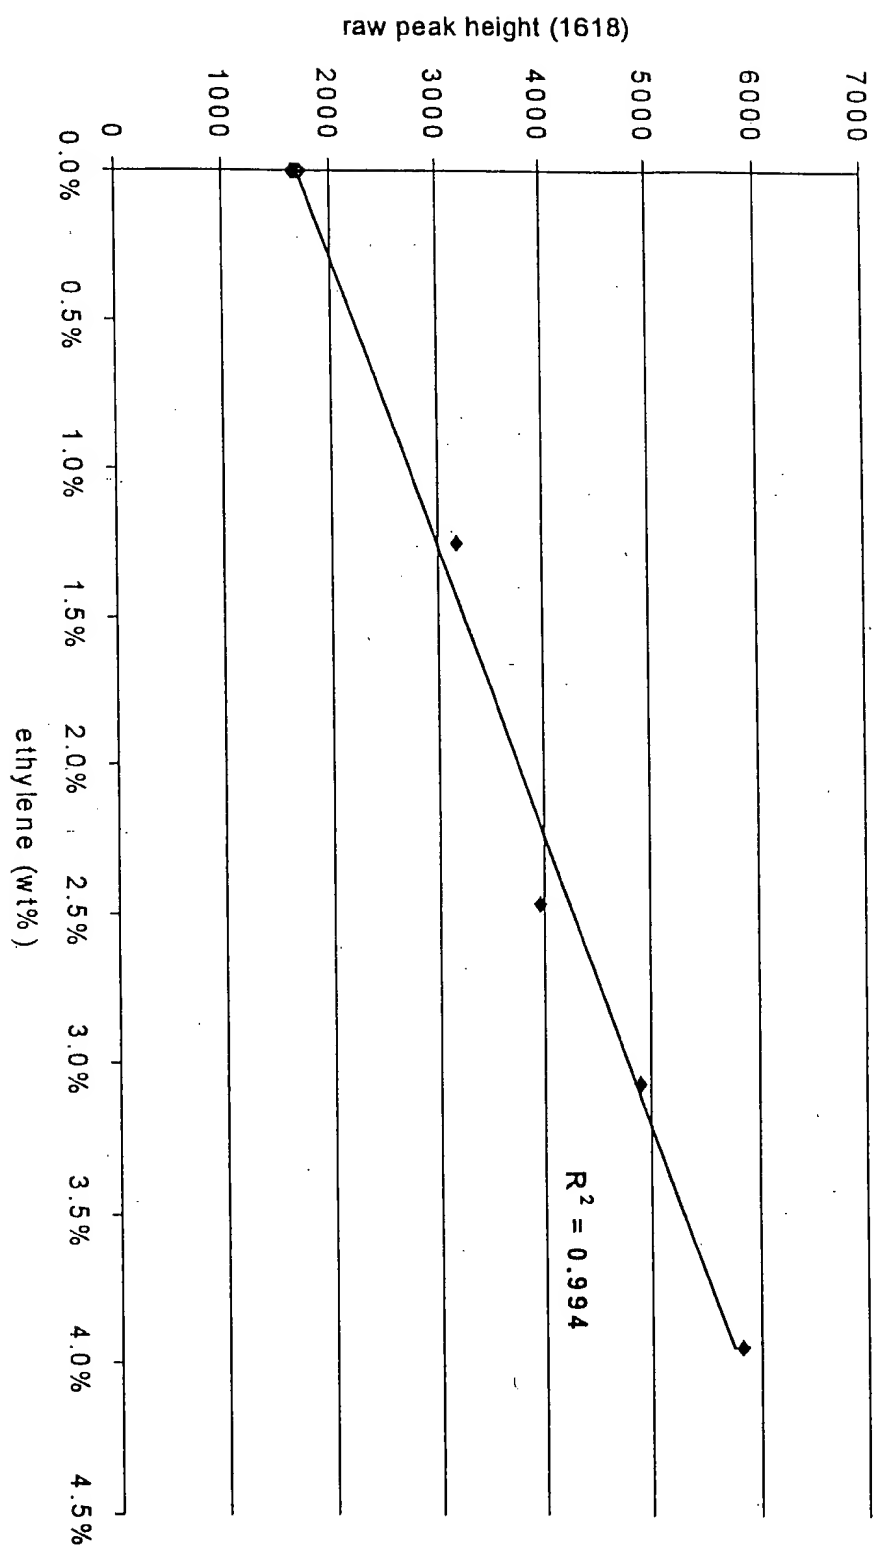

Ethylene Concentration by raw peak height at 1618 /cm

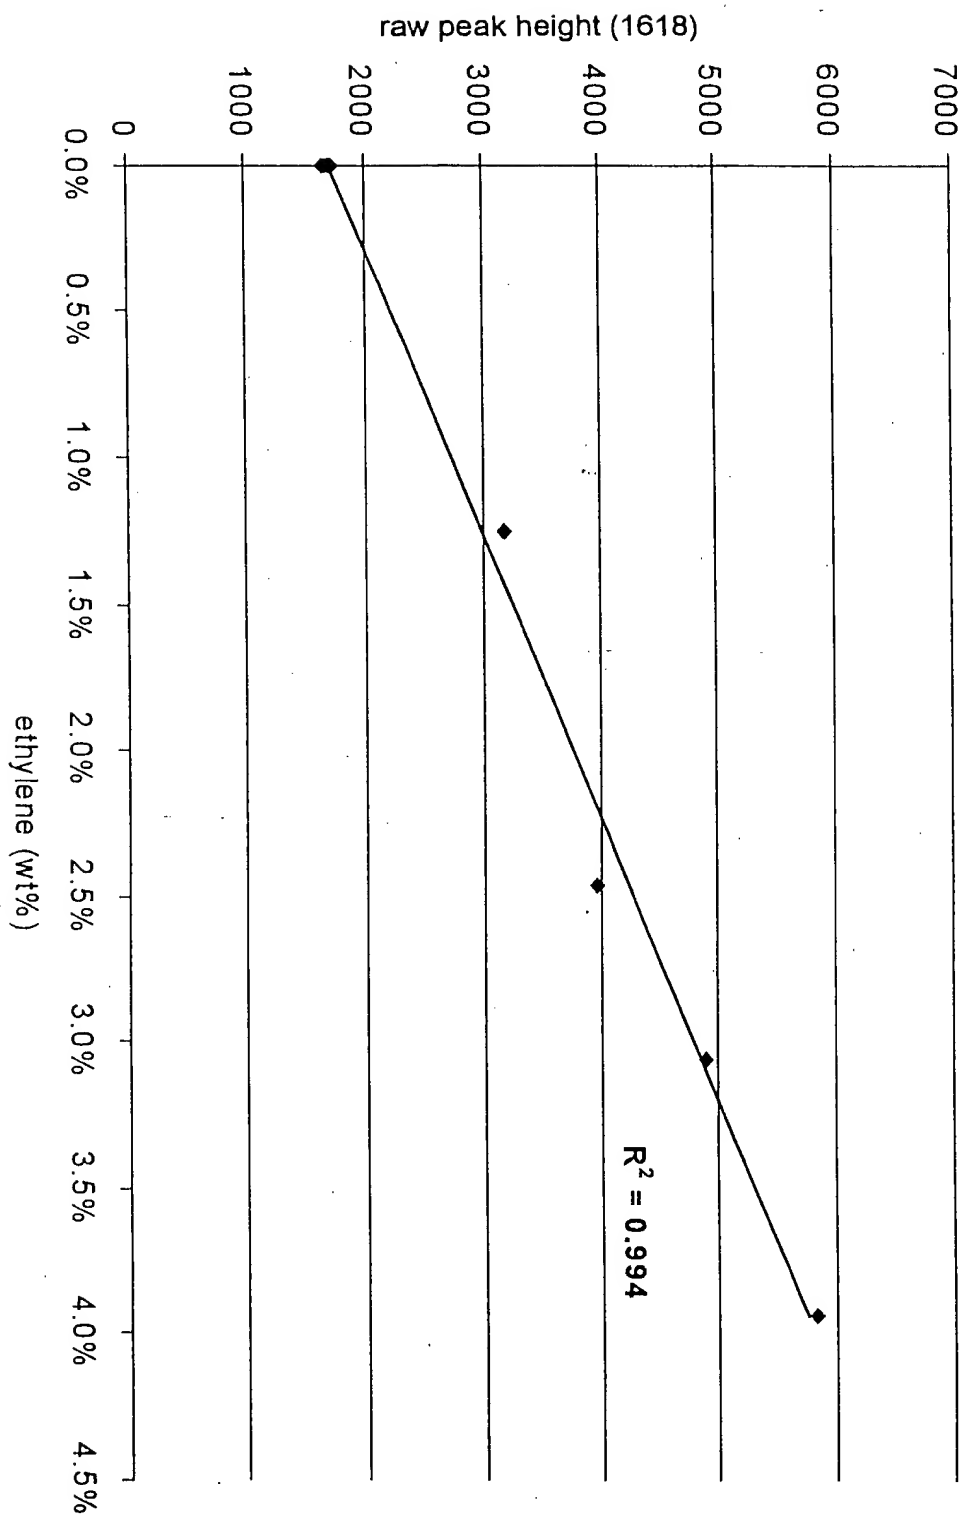

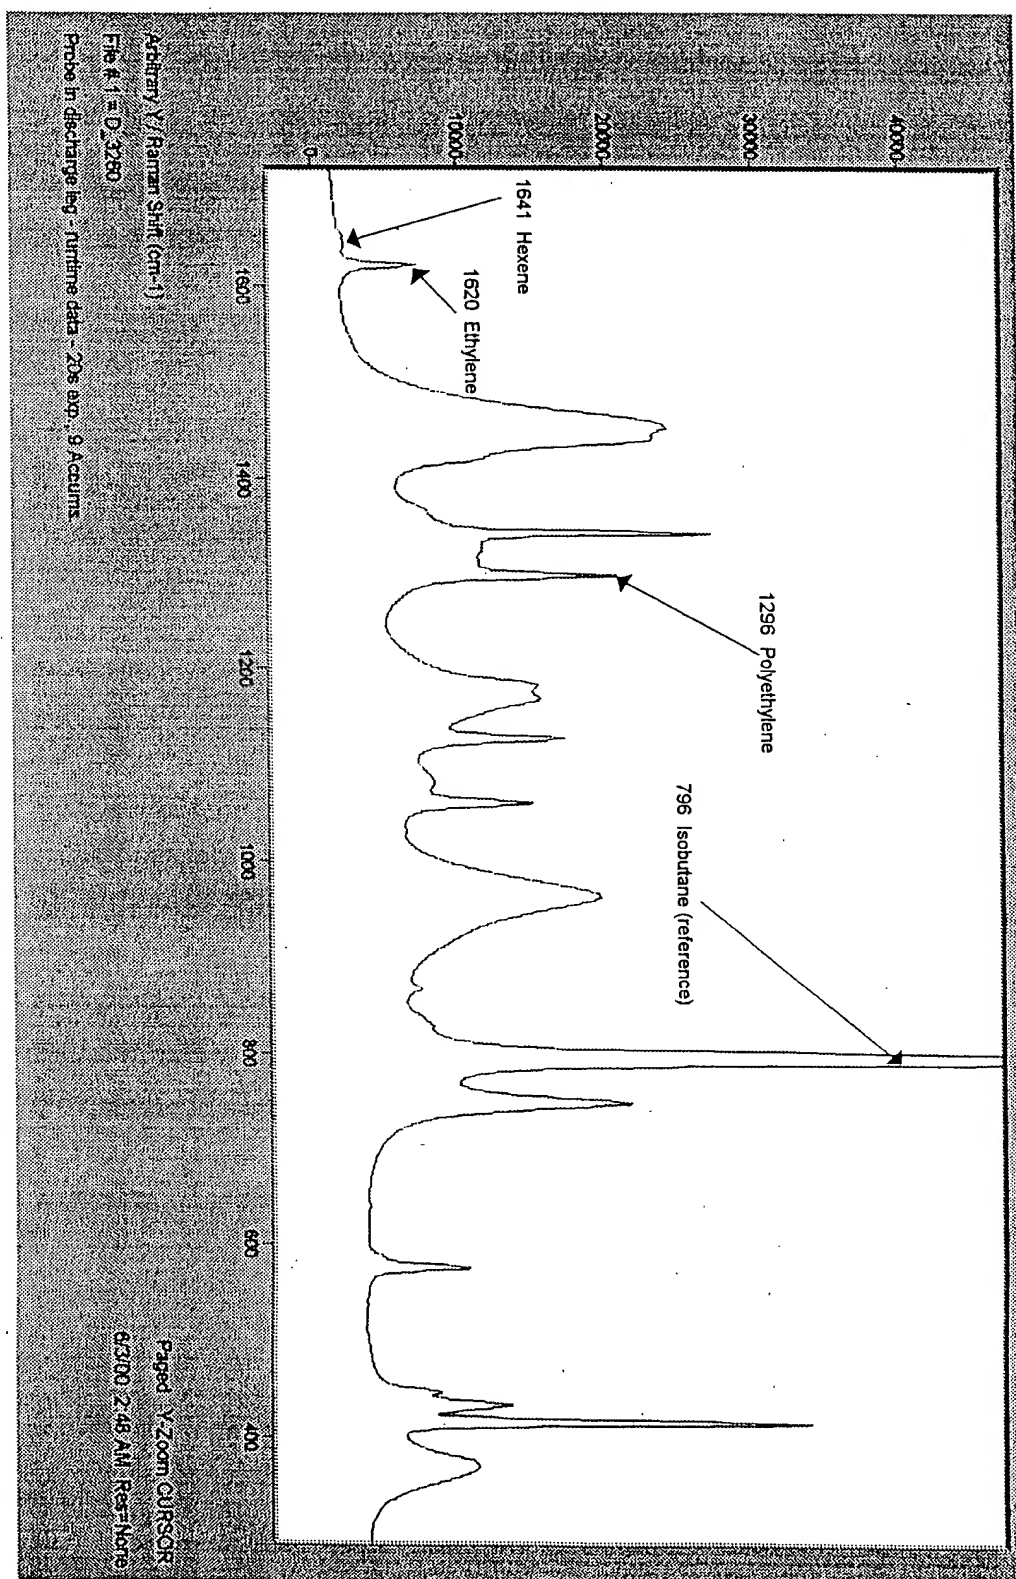[illegible]

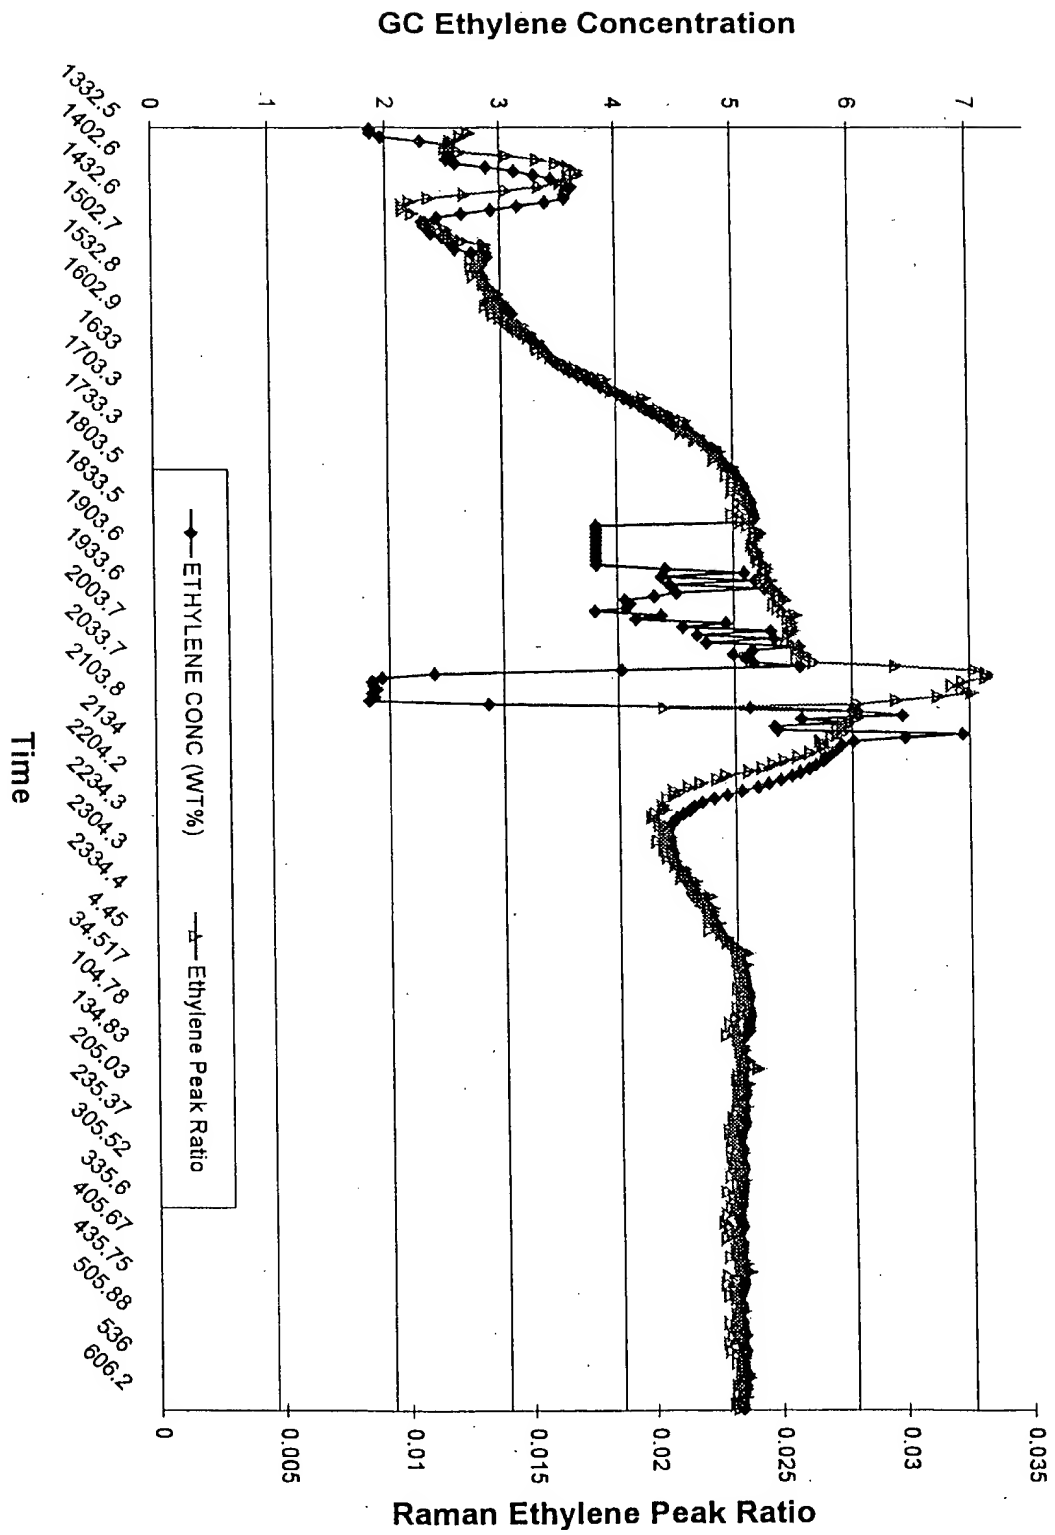


Figure 14

PRINT OF DRAWINGS
AS ORIGINALLY FILED

Figure 15


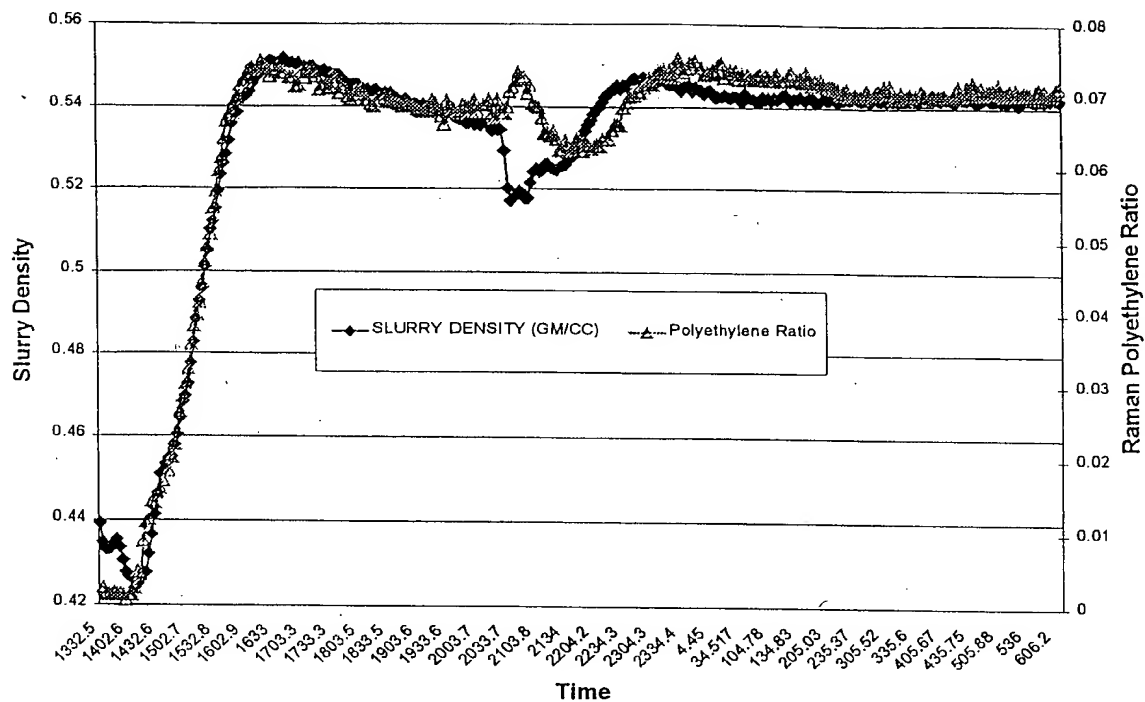


Figure 16

Imaging probe assembly

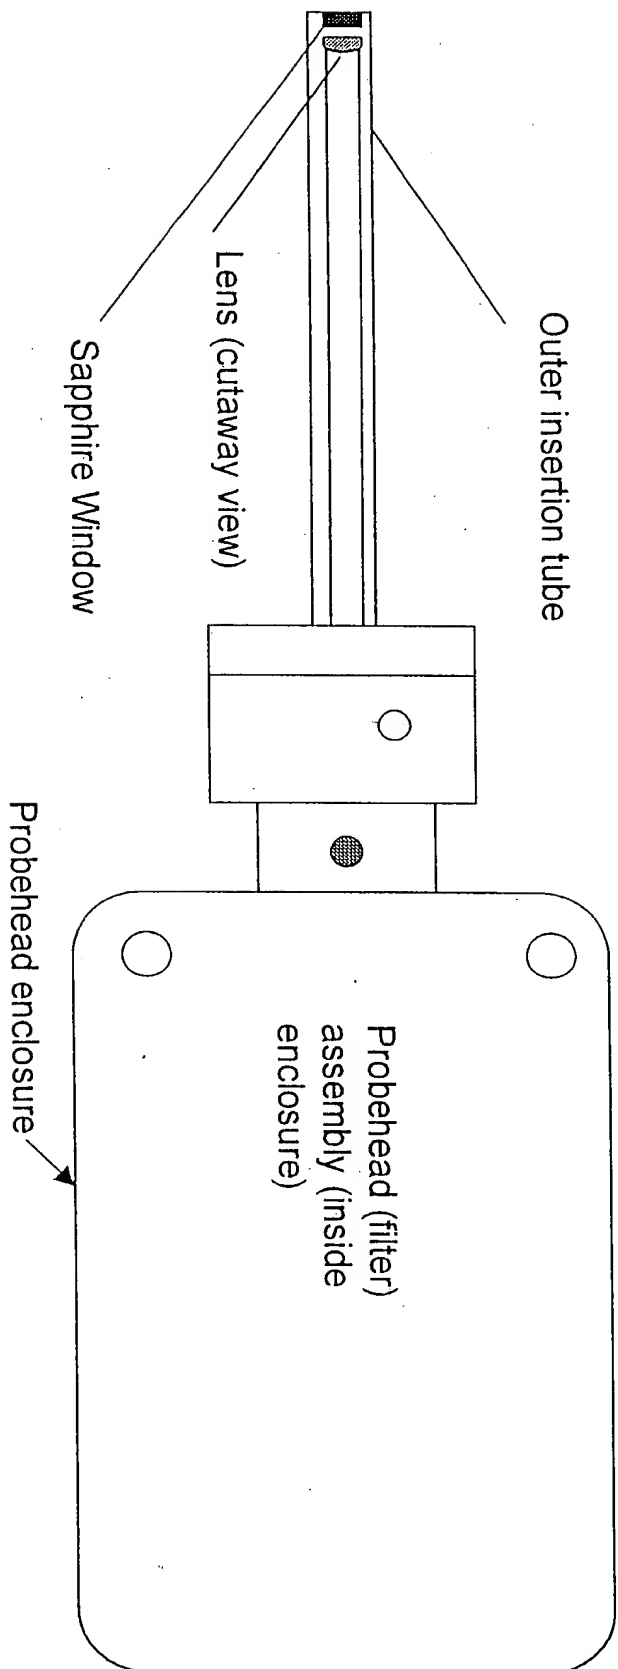

PRINT OF DRAWINGS
AS ORIGINALLY FILED

THIS DRAWING IS THE PROPERTY OF THE U.S. GOVERNMENT AND IS LOANED TO YOUR ORGANIZATION. IT AND ITS CONTENTS ARE NOT TO BE DISTRIBUTED OUTSIDE YOUR ORGANIZATION.